

# Positioning

## All-in-One Touch POS Systems

- For hospitality, restaurants and speciality retail applications as well as kiosk information terminal / Panel PC solutions
- For large and medium retailers searching for a reliable and space-saving POS System
- Compact design for desktop installation
- Broad selection of integrated add-on devices
- Spill-proofed system design


- ✓ Future-proved technology
- ✓ Retail hardened design
- ✓ Scalable product portfolio
- ✓ Smooth Remote-control
- ✓ Servicefriendly
- ✓ 80Plus power supply
- ✓ TCO optimized design
- ✓ Extended lifecycle

# Facts

## Environmental Friendliness

- Energy-efficient processors
- 80PLUS / Energy Efficiency Level V power supply
- System powered peripherals
- Power-saving features (ACPI)
- Energy-saving flash memory (SSD)
- Extended lifetime
- WEEE & RoHS & REACH compliant

## System performance in comparison

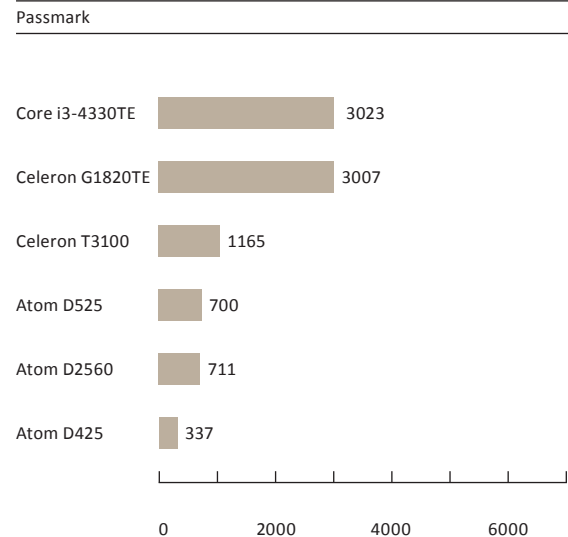

Version 22.07.2014

Published by  
**Wincor Nixdorf International GmbH**  
Heinz-Nixdorf-Ring 1  
D-33106 Paderborn  
Germany  
Phone: +49 (0) 52 51 / 6 93-30  
Fax: +49 (0) 52 51 / 6 93-77 30  
info.retail@wincor-nixdorf.com  
[www.wincor-nixdorf.com](http://www.wincor-nixdorf.com)

© Wincor Nixdorf International GmbH

Printed in Germany, August 2014






**WINCOR  
NIXDORF**  
EXPERIENCE MEETS VISION.

# BEETLE All in One POS systems



**WINCOR  
NIXDORF**  
EXPERIENCE MEETS VISION.

# BEETLE All-in-One POS Systems - Future-proof technology for professional retail solutions

All in One					
					
Model	BEETLE /iPOS plus Advanced	BEETLE /iPOS plus	BEETLE /Fusion 15"	BEETLE /Express 15"	BEETLE /Express 10,4"
Processor technology					
Intel processor	Celeron G1820TE, 2 x 2,2 GHz Core i3-4330TE, 2 x 2,4 GHz Core i5-4570TE, 2 x 2,7 GHz	Atom D2560, 2x 2.0 GHz	Atom D525, 2x 1,8 GHz	Atom D525 2x 1,86 GHz	Atom D425 1,86 GHz
Main memory	max. 16 GB	max. 4 GB	max. 4 GB	max. 4 GB	max. 4 GB
Integrated storage devices					
HDD / SSD	up to 2	1	1	1	1
Optical disk drive	-	-	-	-	-
System interfaces					
COM   powered COM (RS 232) / Optional	1   1 / 1 3	-   2	1   3	1   1	1   1
USB 2.0	3	2	2	5	5
USB 3.0	2	-	-	-	-
PoweredUSB (24V   12V) / Optional	-   - / 1   2	-   1	1   1	-	-
Cash drawer	1	1	1	1	1
LPT	-	-	-	-	-
PS/2   Audio	-   ✓	-   ✓	✓   ✓	-	-
Video ports	DVI-D, PLink2	VGA	VGA (2. Display)	-	-
LAN	10/100/1000	10/100/1000	10/100/1000	10/100	10/100
PCI (Express) slots	1 x mini PCIe	-	1 x mini PCIe	-	-
Advanced Features					
64 Bit OS Support	✓	-	-	-	-
Intel AMT	-	-	-	-	-
Dual Display Support	✓	✓	✓	-	-
Spillproof (front/back)	IP54   IP31	IP65   IP31	IPX4   IP32	IPX4   IP32	IPX4   IP32
Display options					
Type	15" TFT	15" TFT	15" TFT	15" TFT	10,4" TFT
Resolution	1024 x 768	1024 x 768	1024 x 768	1024 x 768	800 x 600
Touch technology	resistive, pcm	PCM	capacitive und resistive	resistive	resistive
VESA Standard	100 x 100	75 x 75   100 x 100	100 x 100	100 x 100	100 x 100
Footprint					
Dimensions (W x D x H)	350 x 66/232 x 310/356 (without/with foot)	365 x 65/194 x 302/315 (without/with foot)	370 x 96/265 x 336/430 (without/with foot)	354 x 360 x 293	263 x 293 x 285

Delivery and technical changes reserved.